

DATASHEET

202-101 Low Dome Anti-Slip Tactile Stud, 25mm



Above. Shown with machined finish

Description

Manufactured from 316 Stainless Steel.
Machined polish finish as standard.
Constructed from non corrosive material.
Long Service life.
To be installed onto finish surface.

Dimensions

25mm \varnothing x 4mm thick top
25mm long x 10mm \varnothing threaded stud

Options



Diameter options: 20mm - 120mm

Material Options

Aluminium - Brass - Bronze

Finishing Options


Burnt - Bright Polish - Sandblasted - Plain Top

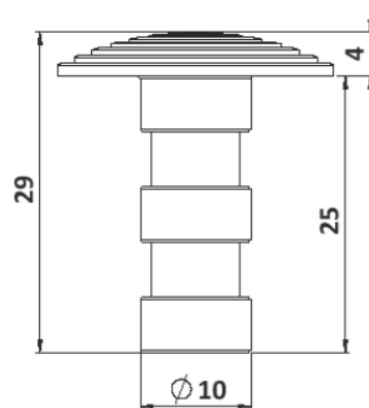

Full installation service - POA



202-101 Low Dome Anti-Slip Tactile Stud Installation

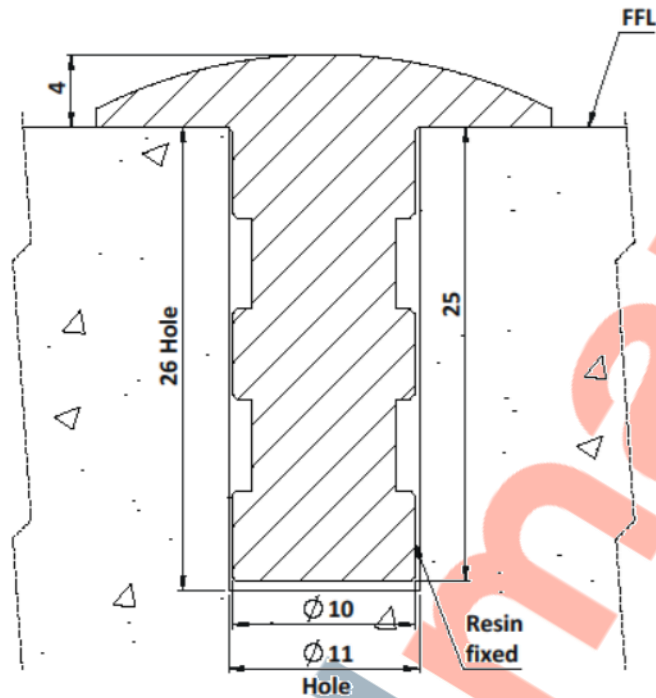


Installation

1. Drill holes 11mm in diameter to the depths shown above.
2. Remove dust and debris caused by drilling.
3. Following the product guidelines, found on the Resin tube, pour a sufficient amount to fill the drilled hole.
4. Push the stud into the hole firmly ensuring an edge seal around the entire stud
5. Allow a few minutes for the Polymer Modified Adhesive to set.

Cleaning & Maintenance

This product is designed for all weather exposure requiring only minimal maintenance as detailed below.

Stainless Steel: Manufactured from premium Stainless Steel. Maintenance free, inspect fixing every 6 months. Add additional adhesive where required.

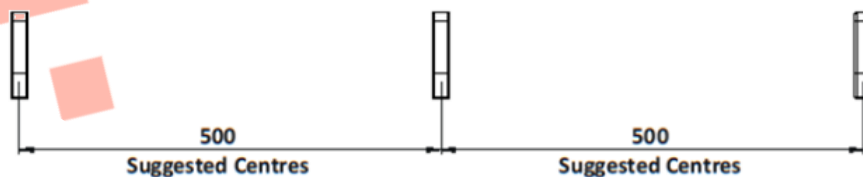

DATASHEET

202-101 Low Dome Anti-Slip Tactile Stud, 25mm

