

202-103 Demarcation Anti-Slip Stud Stainless Steel

Above. Shown with machined finish

Description

Manufactured from 316 Stainless Steel.
Machined polish finish as standard.
Constructed from non corrosive material.
Long Service life.
To be installed flush with the ground.

Dimensions

40mm \varnothing x 5mm thick top
25 long x 8mm \varnothing threaded stud

Options

Diameter options: 20mm - 120mm


Material Options

Aluminium - Bronze - Brass

Finishing Options


Burnt - Bright Polish - Sandblasted - Plain Top

Full installation service - POA

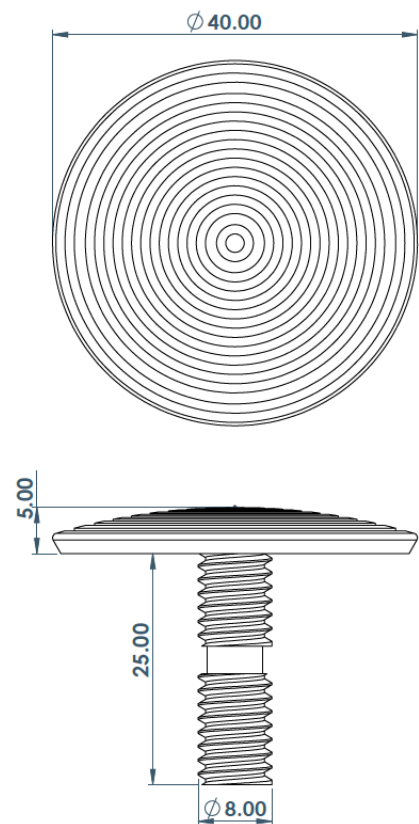

DATASHEET

202-103 Demarcation Anti-Slip Stud Stainless Steel Installation

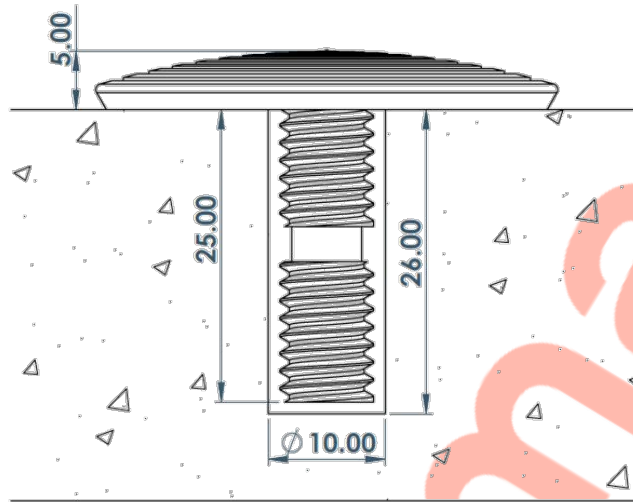


Installation

1. Drill hole 10mm in diameter to the 26mm depth shown above.
2. Remove dust and debris caused by drilling.
3. Following the product guidelines heat the Polymer Modified Adhesive and pour a sufficient amount to fill the drilled hole.
4. Push the stud into the hole firmly ensuring an edge seal around the entire stud
5. Allow a few minutes for the Polymer Modified Adhesive to set.

Cleaning & Maintenance

This product is designed for all weather exposure requiring only minimal maintenance as detailed below.

316 Stainless Steel: Manufactured from 316 Stainless Steel. Maintenance free, inspect fixing every 6 months. Add additional adhesive where required.

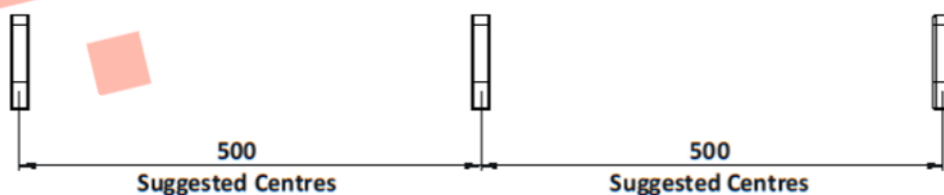

DATASHEET

202-103 Demarcation Anti-Slip Stud Stainless Steel

